

Choosing the Right Programming Language in Making a Website Backend Using the Waterfall Method

<https://doi.org/10.3991/ijes.v10i02.30845>

Teguh Rijanandi^(✉), Faisal Dharma Adhinata
Telkom Institute of Technology Purwokerto, Indonesia, Indonesia
19104008@ittelkom-pwt.ac.id

Abstract—Often we are wrong in choosing a good programming language to create a website backend to process the data we have so the impact is that our website is not able to handle so many requests with a lot of data so users feel uncomfortable because our application takes a very long time to process. Processing each user's request. So in this journal, we will try to discuss the selection of the right programming language for making application backends according to the function of the programming language. In this journal, we will compare the programming languages PHP, Python, Java, and C# for the manufacture of an application backend that must be able to process a very large population of data.

Keywords—programming language, big data, PHP, Python, Java

1 Preliminary

Programming language is an intermediary language between humans and machines, using programming languages we can create various applications, websites, and games. But in this journal, we will focus on Programming Languages that are specifically for websites. A website is an application that contains documents, photos, images, videos, and music that uses the HTTP protocol, and to access it we must use a browser [1]. The function of the website is very much we can use for learning media, promotions, buying and selling, and so on.

Usually, websites can be created using HTML, CSS, and Javascript only. HTML stands for Hypertext Markup Language, HTML is commonly used to describe the framework of a website [2]. CSS (Cascading Style Sheet) is not a programming language but CSS is a tool used to beautify the rigid appearance of a website to be prettier and more beautiful [3]. Javascript is a programming language that can hold application control, the meaning here is that this programming language can be used for both front-end and backend applications at the same time [4].

However, to create a dynamic website we cannot rely on HTML, CSS, and Javascript alone, we need a backend role here, we can use PHP, Python, Java, or C# here. PHP (Personal Home Page) is a programming language that we usually know, PHP is a language similar to Java, C, and Perl [5]. Java programming language is one of the popular programming languages developed by Sun Microsystems, java can also be

used for making android applications and not only used for making backend applications [6]. Python programming language is a multifunctional interpretive programming language, python is claimed to be a programming language that combines capabilities, capabilities, and clear code syntax, Python is widely used in data science, artificial intelligence, and so on [7]. The programming language C # (C Sharp) was developed by the Microsoft company, in the application of writing C # promises to users productivity, flexibility, and convenience from previous applications such as visual basic and others [8]

2 Research method

In this study, we use the SDLC waterfall model and qualitative research methods whose data collection will be carried out at the requirements stage. Qualitative is used for research or a more descriptive study [9]. It is called the waterfall method because it must be passed step by step before it can proceed to the next step [10]. Below we include an illustration of the SDLC waterfall method.

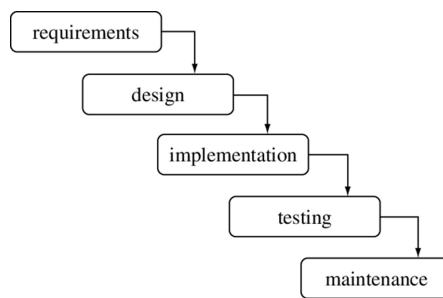


Fig. 1. Illustration of the waterfall model

In this waterfall we will do 5 stages first, namely the requirements stage (needs analysis), the second is the software architecture design, the third is implementation, the fourth we will do testing, and the last we will do maintenance or repair if all programs are running as expected so that the performance of the program can run well.

3 Result and discussion

3.1 Analysis stages

We analyze the system that the system must be able to handle requests or requests from users quickly and precisely so that users do not need a long time to get the results they want. The system must be able to perform the Create Read Update Delete (CRUD) function quickly, therefore we need the right programming language to process this huge amount of data. In this study, we have collected 2423 population data in Karangklesem Village, South Purwokerto, the system must be able to manage, find and process this much data quickly. The following is an example of population data that includes the full name of the resident, ID number, gender, and address of the resident.

Table 1. Example of village population data

Name	ID Card	Gender	Address
Darsirah Vega Zulkarnain M. Farm	00016446386416504	L	Dk. Panjaitan No. 218, Tarakan 48692, NTB
Uli Dinda Astuti SEI	00016446386414157	P	Psr. Suniaraja No. 476, Denpasar 49483, Riau Islands
Farhunnisa Pudjiastuti	00016446386415207	P	Ki. Gatot Subroto No. 94, Kendari 17850, Central Kalimantan
Ellis Wahyuni	00016446386412218	P	Jln. Accordion No. 726, Pekanbaru 36315, Lampung
Agus Nasiruddin	00016446386415324	L	Ki. Main Division No. 630, Lhokseumawe 85595, DIY

We store the data in a database system called MySQL. Mysql is a SQL-based database system to create a DBMS or Database Management System [11]. Mysql is quite popular and widely used for various types of applications. And below, we also attach a screenshot of the table schema and an example of the population data.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
1	id	int(11)			No	None		AUTO_INCREMENT	Change Drop More
2	nama	varchar(255)	utf8mb4_general_ci		No	None			Change Drop More
3	ktp	varchar(255)	utf8mb4_general_ci		No	None			Change Drop More
4	jenis_kelamin	varchar(100)	utf8mb4_general_ci		No	None			Change Drop More
5	alamat	varchar(100)	utf8mb4_general_ci		No	None			Change Drop More

Fig. 2. Table structure

	id	nama	ktp	jenis_kelamin	alamat
<input type="checkbox"/>	1	Darsirah Vega Zulkarnain M.Farm	00016446386416504	L	Dk. Panjaitan No. 218, Tarakan 48692, NTB
<input type="checkbox"/>	2	Uli Dinda Astuti S.E.I	00016446386414157	P	Psr. Suniaraja No. 476, Denpasar 49483, Kepri
<input type="checkbox"/>	3	Ifa Fujiati S.T.	00016446386415150	P	Jln. Bak Mandi No. 598, Lubuklinggau 64644, Banten
<input type="checkbox"/>	4	Farhunnisa Pudjiastuti	00016446386415207	P	Ki. Gatot Subroto No. 94, Kendari 17850, Kalteng
<input type="checkbox"/>	5	Ellis Wahyuni	00016446386412218	P	Jln. Accordion No. 726, Pekanbaru 36315, Lampung
<input type="checkbox"/>	6	Carla Handayani	00016446386415019	P	Kpg. Lembong No. 765, Tebing Tinggi 43054, Papua
<input type="checkbox"/>	7	Lukita Utama Prasetya	00016446386417077	L	Ki. Ciwastra No. 554, Banjar 44646, Jateng
<input type="checkbox"/>	8	Cengkal Hardi Sirait S.IP	00016446386413927	L	Dk. Babadak No. 897, Pontianak 28712, Kaltim
<input type="checkbox"/>	9	Farhunnisa Ayu Purnawati	00016446386415654	P	Psr. Warga No. 657, Semarang 16553, NTT
<input type="checkbox"/>	10	Oskar Prasetya	00016446386418352	L	Kpg. Ciumbuleit No. 345, Administrasi Jakarta Pus...
<input type="checkbox"/>	11	Saadat Waluyo	00016446386414271	L	Jr. Babakan No. 352, Cirebon 49858, Lampung
<input type="checkbox"/>	12	Omar Teguh Nababan	00016446386416407	L	Kpg. Bakau No. 773, Denpasar 10059, Gorontalo

Fig. 3. Example of population data

3.2 Design stages

We design a software architecture design, namely an application in the form of a Rest API that provides data in the form of JSON. Rest is an architecture for designing a web service where REST has an accessible URL. Rest will send commands to be executed using the HTTP GET, POST, PUT, and DELETE methods [12]. While JSON (JavaScript Object Notation) is a lightweight semi-structured data format that is widely used based on the JavaScript data type [13]. Below we include a screenshot of the output rendered by the backend of the application which will be used to fulfill the user's request. The output provided is in the form of resident ID data, resident names, resident ID numbers, gender of residents, and complete addresses of residents wrapped in JSON format.

```
{
  "current_page": 1,
  "data": [
    {
      "id": 1,
      "nama": "Darsirah Vega Zulkarnain M.Farm",
      "ktp": "00016446386416504",
      "jenis_kelamin": "L",
      "alamat": "Dk. Panjaitan No. 218, Tarakan 48692, NTB"
    },
    {
      "id": 2,
      "nama": "Uli Dinda Astuti S.E.I",
      "ktp": "00016446386414157",
      "jenis_kelamin": "P",
      "alamat": "Psr. Suniaraja No. 476, Denpasar 49483, Kepri"
    },
    {
      "id": 3,
      "nama": "Ifa Fujiati S.T.",
      "ktp": "00016446386415150",
      "jenis_kelamin": "P",
      "alamat": "Jln. Bak Mandi No. 598, Lubuklinggau 64644, Banten"
    }
  ],
  "first_page_url": "http://localhost:4444/contoh_data?page=1",
  "from": 1,
  "last_page": 808,
  "last_page_url": "http://localhost:4444/contoh_data?page=808",
  "links": [
    > 15 items, 1 KB {}, {}, {}, {}, {}, {}, {}, {}, {}, {}, {}, {}, {}, {}
  ],
  "next_page_url": "http://localhost:4444/contoh_data?page=2",
  "path": "http://localhost:4444/contoh_data",
  "per_page": 3,
  "prev_page_url": null,
  "to": 3,
  "total": 2423
}
```

Fig 4. Example of the given output

In the picture above, we provide 3 examples of population data given, if only 3 programming languages PHP, Python, Java, and C# are strong to manage, but imagine if the data provided is 1000 or even up to 2423 the number of data, maybe one of the four or only a few programming languages that can process that much data. We attach a discussion of this to the implementation sub-chapter.

3.3 Implementation stages

After we collected 2423 population data, now we will perform performance tests on the PHP, Python, Java, and C# programming languages to see which one is suitable for processing that much data. Before that, we explain about each – each of these programming languages.

1. Python

Python is commonly used in web development, artificial intelligence. The advantage of this python is that the writing of code that is simple and easy to read is not verbose, but python is not suitable if used for mobile development.

2. PHP

PHP is mostly used for web development, PHP cannot be used for making mobile or desktop applications. PHP has the advantage of being used by many users so that if we have an error we can immediately find a solution, and PHP has an error handling feature.

3. Java

Java is mostly used to create desktop and android applications, Java can also be used to create web backends. Java has a lot of open source libraries and a lot of users, but Java has the disadvantage that it takes up a lot of RAM in the compilation process.

4. C#

C# is usually used to create cross-platform applications, games, and backend websites, C# has the advantage of a fast compilation process, but C# has the disadvantage that it takes a lot of time to learn.

We have collected data regarding the testing of each of these programming languages, each of which we explain in the testing section.

3.4 Stages of testing

In this testing phase, we have collected and tested the performance of the Python, PHP, Java, and C# programming languages. Look at the diagram below, the programming language whose diagram is getting to the right is the programming language that has the best performance.

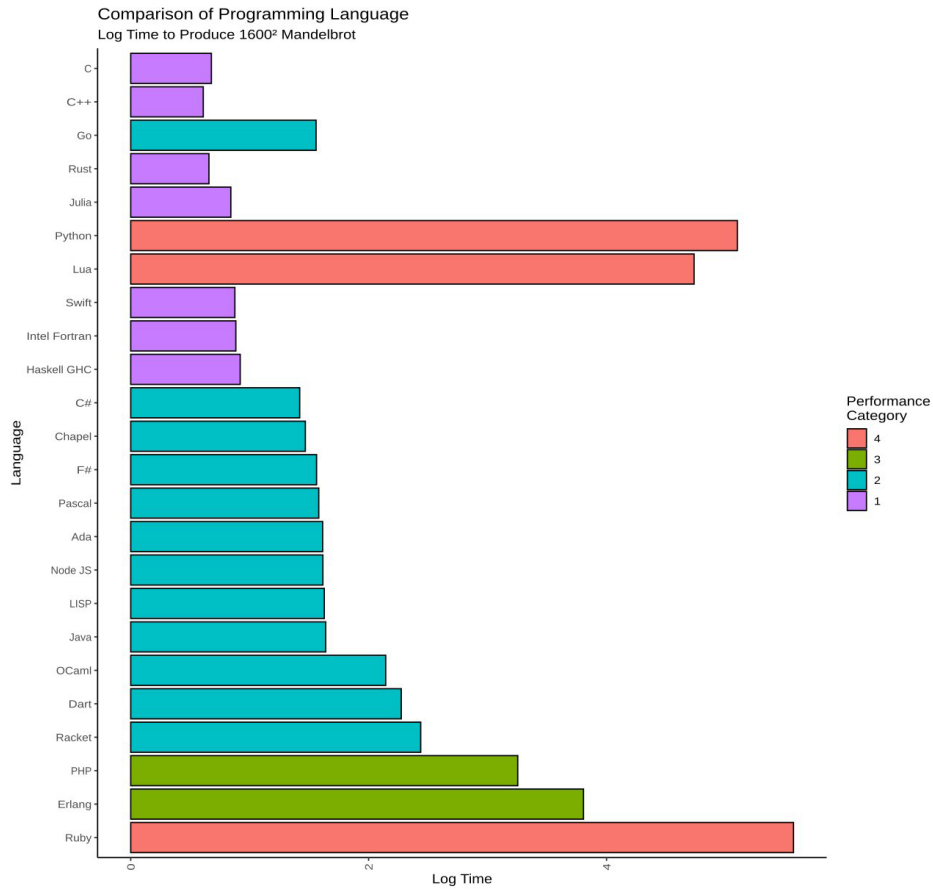


Fig. 5. Programming language performance diagram

We have also proven that Python has a very high performance, has a very concise code structure compared to the PHP, Java, and C# programming languages. Python, PHP, and C# use very little memory during the compilation process if we compare it in terms of memory usage, but if we compare it in terms of code structure, python is still ranked first. Look at the memory usage diagram of each programming language.

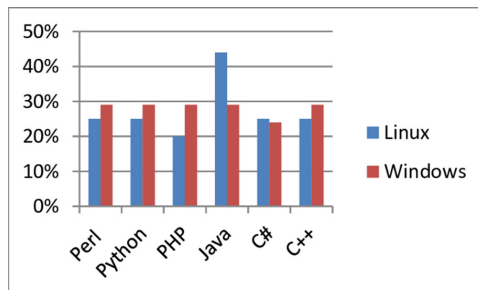


Fig. 6. Programming language performance diagram

From here we can draw a little conclusion that python and PHP are very suitable to be used to create backend web services because they both have good performance and small memory usage, but for a comparison of code structure, it's just the taste of each between PHP and python, because there are different accustomed to using PHP so some say PHP is concise in writing, even though python can be more concise and simpler to write.

3.5 Maintenance stages

At this stage, we have succeeded in determining which programming language we want to use. We will carry out regular maintenance or repair processes so that the code and system can run properly without hampering user activities. Because if we don't do regular maintenance, the code could have an error and will hamper user requests. We will update the system, libraries and monitor everything goes well.

4 Conclusion

This research concludes that each programming language has its advantages and disadvantages. We cannot blame each other because indeed every programming language was created for its purpose. For the creation of this web service backend, we have concluded a little earlier that Python and PHP can be used for making this backend because the code structure is very compact and the memory usage is minimal. But here we return to each user's taste whether you want to use python or PHP to make the backend.

5 References

- [1] P. S. Hasugian, "Website Design as a Media of Promotion and Information," *Journal of Informatic Pelita Nusantara*, pp. 82–86, 2018.
- [2] A. Saputra and Y. Astuti, "Analysis of the Effect of HTML Structure on Search Engine Result Page Ranking," *Journal of Mantik Penusa*, pp. 34–39, 2018.
- [3] P. Widodo and G. E. Saputra, "Designing an E-Commerce Website for Selling Pencak Silat Sports Equipment," *Indonesian Journal on Networking and Security*, pp. 17–26, 2018.
- [4] P. Widodo and I. Ikhsanudin, "Designing Agricultural Websites in Ploso Gede Ngluwar Magelang as Information and Marketing Media (Case Study on Hidayah Farmers Group)," *Journal Speed – Engineering and Education Research Center*, vol. 10, no. 4, pp. 84–91, 2018.
- [5] P. B. Santoso and D. T. Reynaldi, "Technology Issues of STT Mandala Vol.15, no.2, December 2020, p-ISSN 1979-4819, e-ISSN 2599-193014. Website Design of Potential Map of Earth and Building Tax in Kebon Kangkung Village," *Journal of Technology Issues, High School Technology*. pp. 14–21, 2020.
- [6] N. S. Sibarani, G. Munawar, and B. Wisnuadhi, "Performance Analysis of Android Applications in Java and Kotlin Programming Languages," *Department of Computer and Informatics Engineering, Bandung State Polytechnic*, pp. 319–324, 2018.
- [7] A. N. Syahrudin and T. K., "Input and Output in the Python Programming Language," *Stmik's Journal of Basic Python Programming*, pp. 1–7, 2018.
- [8] YMS and M., "The Level of Accuracy of Numerical Integration Calculation Results Using the C# Programming Language on Reimann and Trapezoidal Methods," *Infotek: Journal of Informatics and Technology*, vol. 2, no. 1, pp. 8–17, 2019.

- [9] W. Yuliani, “Qualitative Description Research Methods in Guidance and Counseling Perspective,” *Quanta STKIP Siliwangi Journals*, vol. 2, no. 2, pp. 83–91, 2018.
- [10] N. Hidayati, “Using the Waterfall Method in the Design of Sales Information Systems,” *Generation Journal of Universitas Nusantara PGRI Kediri*, vol. 3, no. 1, 2019.
- [11] C. Kesuma, Y. M. Kristania, and F. Isnaeni, “Web-Based Marriage Registration Information System at the Banyumas District Religious Affairs Office,” *Evolusi Journal*, vol. 6, no. 2, pp. 26–35, 2018.
- [12] M. I. Perkasa and E. B. Setiawan, “Development of Community Data Web Service Using REST API with Access Token,” *Ultima Computing Journal of Computer Systems UMN*, pp. 19–26, 2018. <https://doi.org/10.31937/sk.v10i1.838>
- [13] T. Lv, P. Yan, and W. He, “Survey on JSON Data Modeling,” *Journal of Physics: Conference Series*, 2018. <https://doi.org/10.1088/1742-6596/1069/1/012101>

6 Authors

Teguh Rijanandi S1 Software Engineering Study Program, Faculty of Informatics, Telkom Institute of Technology Purwokerto, Indonesia.

Faisal Dharma Adhinata is a lecturer in Software Engineering Study Program, Faculty of Informatics, Telkom Institute of Technology Purwokerto (email: faisal@ittelkom-pwt.ac.id).

Article submitted 2022-03-29. Resubmitted 2022-04-10. Final acceptance 2022-04-11. Final version published as submitted by the authors.